

Instruction Manual

HDBaseT Receiver

En


HDB-RX1

SN29355998


F17111-0




What's in the Box

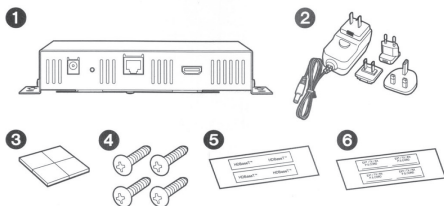

- 1 Main unit (1) 2 AC adaptor (1) 3 Cushions (4)
 - 4 Screws for wall attachment (4) 5 Label for HDBaseT™ cable (2)
 - 6 Label for AC adaptor cord (2)
- Instruction Manual (this document)



Part Names

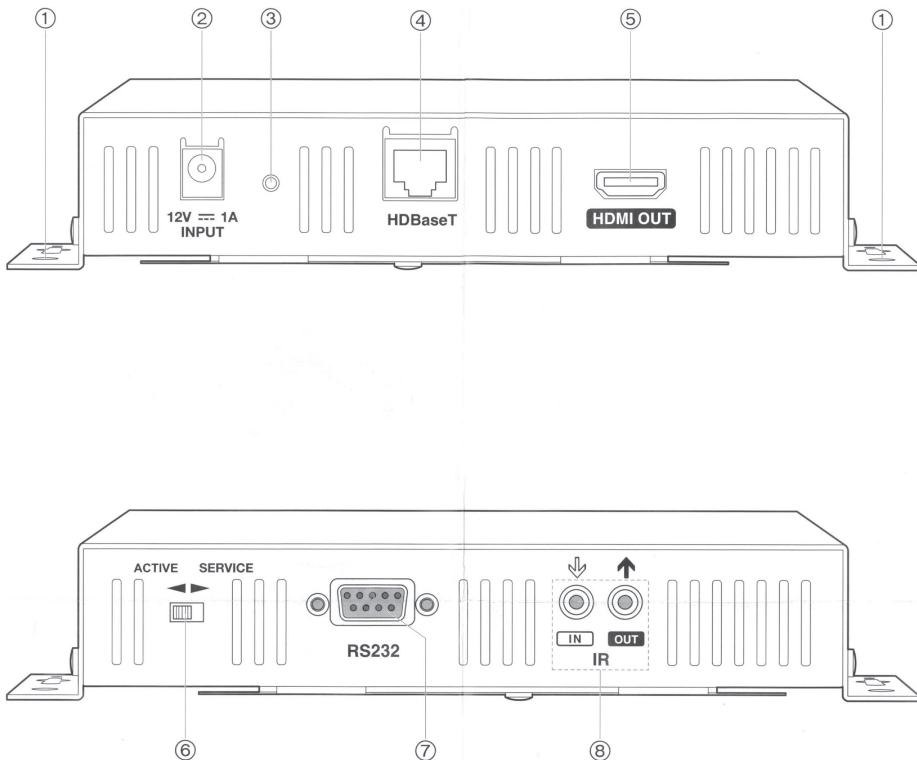

- ① Screw hole for wall attachment: Fix with the supplied screw for wall attachment when installing on a wall.
- ② 12V 1A INPUT jack: When connecting to a device that does not support Power over Cable (PoC, refer to the back cover), connect the supplied AC adapter.
- ③ Power indicator: Lights when the power of this unit is on.
- ④ HDBaseT jack: Use an Ethernet cable to connect to the HDBaseT™ OUT jack on one of our AV receivers to receive video signals, audio signals, control signals, etc.
 - As they are covered with a seal when shipped, remove it when you use the jack.
 - Use one of the following Ethernet cables to connect.
 - When using Power over Cable (PoC, refer to the back cover)
 - Cat6 (Category 6) cable: AWG23 cable or better, 50 m or less in length
 - Cat5e (Category 5e) cable: AWG24 cable or better, 45 m or less in length
 - When not using Power over Cable (PoC, refer to the back cover)
 - Cat6 (Category 6) cable: AWG23 cable or better, 100 m or less in length
 - Cat5e (Category 5e) cable: AWG24 cable or better, 90 m or less in length
 - It is recommended to use shielded single Ethernet cable.
 - Do not connect this port to the Ethernet ports of network devices.
- ⑤ HDMI OUT jack: Transmit video signals and audio signals with a HDMI cable connected to a monitor such as a TV or projector.
- ⑥ ACTIVE/SERVICE switch: Use in the "ACTIVE" position. ("SERVICE" is for servicing)
- ⑦ RS232 port: Used when connecting to a home control system.
 - Use a straight cable.
- ⑧ IR IN/OUT jacks: Used when connecting to a multiroom remote control kit.
 - Refer to the instruction manual of the IR receiver for the types of cables required for connection.

HDMI

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

HDBT

HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance.

All other trademarks are the property of their respective owners.

HDMI

Supported

Deep Color, x.v.Color™, LipSync, 3D, 4K 60 Hz, Extended Colorimetry (sYCC601, Adobe RGB, Adobe YCC601), Content Type, HDR
HDCP
Revision 1.4, 2.2
Maximum Video Resolution
4k 60 Hz (YCbCr 4:4:4)

Output jacks

HDMI OUT : 1

Other jacks

HDBaseT IN : 1
RS232 : 1 (Path through)
IR IN : 1 (Path through)
IR OUT : 1 (Path through)


General

Power Supply

AC 100 - 240 V, 50/60 Hz
Power Consumption
11.2 W (AC adaptor)
Dimensions (W × H × D)
205 mm × 35 mm × 89 mm
8-1/16" × 1-3/8" × 3-1/2"
Weight
0.45 kg (1 lb)

• Specifications and features are subject to change without notice.

• We will not accept responsibility for damage arising from the connection of equipment manufactured by other companies.

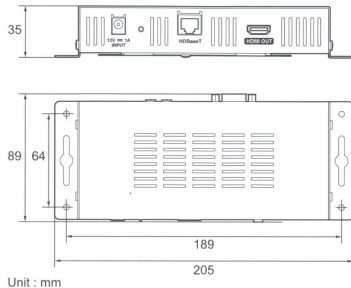


Integra

Installation & Basic Connections

- Use an Ethernet cable to connect the HDBaseT™ OUT jack on one of the following of our AV receivers to the HDBaseT jack on this unit to transfer video, audio, and control signals. (DRX-4/DRX-5/DRX-7/DRX-R1/DRX-R1.1/DRX-R1.1, and models supporting HDBaseT™ OUT sold in 2018 and thereafter)
- When using one of our AV receivers that supports Power over Cable (PoC), it is also possible to supply this unit with power over the Ethernet cable.

■ When installing on the floor


When installing on the floor, use the supplied cushions to help prevent damage to the floor.



Cushions


■ When installing on a wall

Fix this unit with the supplied screws for wall attachment when installing on a wall.



Screws for wall attachment

- Do not attach to the ceiling.
- After attaching, check that the fitting is secure. We accept no responsibility for damage or injury that arises due to incorrect attachment.

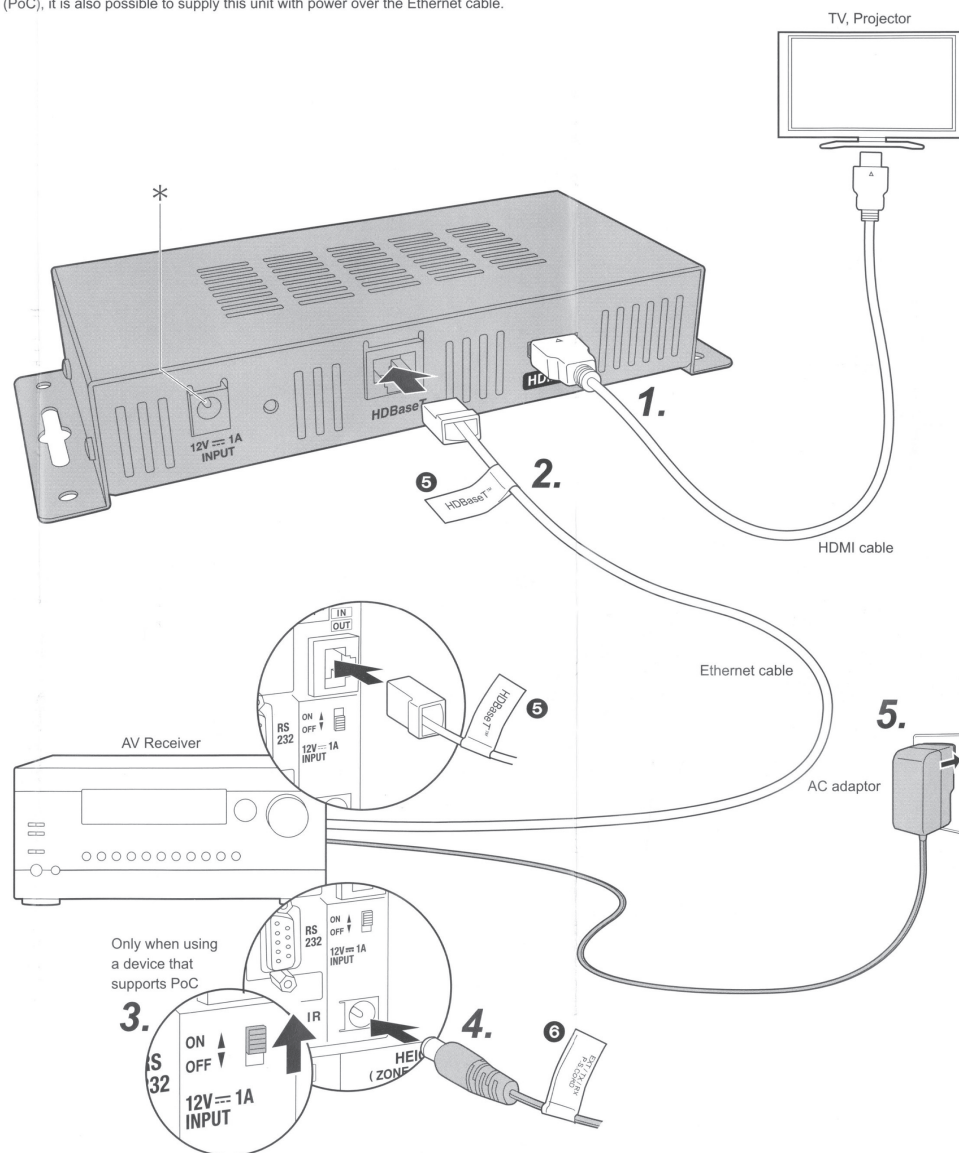


1. Connect this unit to a monitor such as a TV or projector using an HDMI cable.
2. Connect this unit to one of our AV receivers using an Ethernet cable.
3. Set the ON/OFF switch on the rear of the AV receiver to ON.
- 4, 5. Connect the AC adaptor.

* If a device that does not support Power over Cable (PoC) is connected, connect the AC adaptor to the 12V 1A INPUT jack on the rear of the unit.

Other Connections


■ RS232 Connections

This is an example of connecting to a home control system with an RS232 cable. Also read the instruction manual supplied with the connected device.

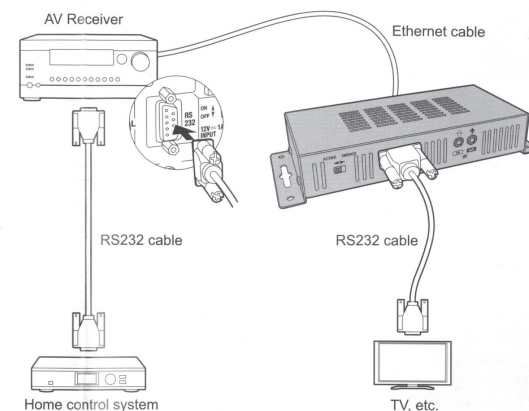

■ IR Connections

This is an example of connection to an IR receiver. Also read the instruction manual supplied with the connected device.

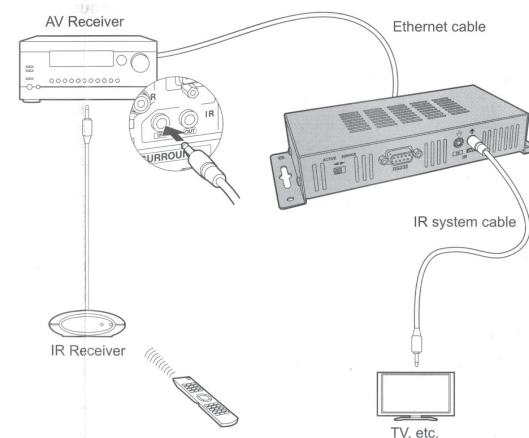



* 2 9 4 0 3 0 9 5 *

En Safety Information / Inquiries

jp 安全上のご注意 / お問い合わせ先（保証書在中）

簡中 安全信息 / 咨询（包含在保修卡中）



Safety Information

■ WARNING

TO PREVENT THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

This equipment is not waterproof. To prevent a fire or shock hazard, do not place any container filled with liquid near this equipment (such as a vase or flower pot) or expose it to dripping, splashing, rain or moisture.

To prevent a fire hazard, do not place any naked flame sources (such as a lighted candle) on the equipment.

Store small parts out of the reach of children and infants. If accidentally swallowed, contact a doctor immediately.

Slots and openings in the cabinet are provided for ventilation to ensure reliable operation of the product, and to protect it from overheating. To prevent fire hazard, the openings should never be blocked or covered with items (such as newspapers, tablecloths, curtains) or by operating the equipment on thick carpet or a bed.

When positioning this equipment ensure that the main plug and socket is easily accessible.

Store the AC adaptor out of the reach of children and infants.

The AC adaptor cord may accidentally wind around the neck and it may cause suffocation.

■ Precautions

Operating Environment

Operating environment temperature and humidity: +5°C to +35°C (+41°F to +95°F); less than 85%RH (cooling vents not blocked)
Do not install this unit in a poorly ventilated area, or in locations exposed to high humidity or direct sunlight (or strong artificial light).

Important Notice

The model number and serial number of this equipment are on the rear or bottom. Record these numbers on your enclosed warranty card and keep in a safe place for future reference.

This product is for general household purposes. Any failure due to use for other than household purposes (such as long-term use for business purposes in a restaurant or use in a car or ship) and which requires repair will be charged for even during the warranty period.

AC adaptor Caution

Hold the body of the AC adaptor to plug in and unplug from the outlet. Using the cable to plug in or unplug can lead to dangers such as wires disconnecting. Do not touch the body of the AC adaptor or cable while wet. This may result in electric shock. Do not place the unit or furniture on the cable or pinch the cable. Damage to the cable may result in fire or electric shock. Request repair if there is damage. If the unit is used while the plug is incompletely plugged in, there is a possibility of electric shock or fire due to overheating. Do not use an outlet which allows the plug to be unplugged easily.

Do not wire the Ethernet cable outdoors.

As malfunction may result, do not use the supplied AC adaptor with devices other than this unit and do not use an AC adaptor other than the supplied one with this unit.

■ For European models

Information for users on collection and disposal of old equipment and used batteries

(Symbol for equipment)

(Symbol examples) for batteries

These symbols on the products, packaging, and/or accompanying documents mean that used electrical and electronic products and batteries should not be mixed with general household waste.

For proper treatment, recovery and recycling of old products and used batteries, please take them to applicable collection points in accordance with your national legislation.

By disposing of these products and batteries correctly, you will help to save valuable resources and prevent any potential negative effects on human health and the environment which could otherwise arise from inappropriate waste handling.

For more information about collection and recycling of old products and batteries, please contact your local municipality, your waste disposal service or the point of sale where you purchased the items.

These symbols are only valid in the European Union.

For countries outside the European Union:
If you wish to discard these items, please contact your local authorities or dealer and ask for the correct method of disposal.

WEEE
<http://www.onkyo.com/manual/weee/weee.pdf>

■ For U.S. and Canadian Models

IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/aparatus combination to avoid injury from tip-over.

PORTABLE CART WARNING



13. Unplug this apparatus during lightning storms or when unused for long periods of time.

14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

This device complies with Part 15 of FCC Rules and Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of this device.

Le présent appareil est conforme aux la partie 15 des regles de la FCC et CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This device complies with following standard and class CAN ICES-3 B/NMB-3 B

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

<U.S.A.>

18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.
Tel: 800-225-1946, 201-818-9200 Fax: 201-785-2650
<http://www.integrahometheater.com>

<Germany>

Gutenbergstrasse 3, 82178 Puchheim, Germany
Tel: +49-8142-4401-0 Fax: +49-8142-4208-213
<http://www.integra.eu>



安全上のご注意

安全にお使いいただくため、ご使用前に必ずお読みください。

●ご使用の前にこの「安全上のご注意」をよくお読みのうえ、正しくご使用ください。
●お読みになった後は、本書をいつでも見られる所に保管してください。
この安全上のご注意、取扱説明書および製品への表示は、製品を安全に正しくお使いいただき、あなたや他人の安全への危害や財産への損害を未然に防止するため、絵表示をしています。その表示と意味は次のようになっています。



警告

誤った使い方をすると、火災・感電などにより死亡または重傷を負う可能性が想定される内容です。



注意

誤った使い方をすると、けがをしたり周辺の家財に損害を与える可能性が想定される内容です。



警告

感電の危険を避けるために、カバーなどを取り外さないでください。修理を行う場合は、資格のあるサービス技術者に修理を依頼してください。また、通風孔やディスクの挿入口、ダクトなどから金属や燃やしやすいもの、その他異物を挿入しないでください。火災・感電の原因となります。

本機は防水仕様ではありません。火災や感電の危険を避けるために、本機の内部に水が入ったり、濡れないようにご注意ください。本機の中に入った容器（花瓶など）を置いたり、雨や湿気にさらさないでください。また、風呂場や屋外の水辺などでは使用しないでください。

本機の上に火がついたロウソクなどの裸火を置かないで下さい。火災の原因になります。

本機の使用環境温度範囲は 5°C ~ 35°C、使用環境湿度は 85% 以下（通風孔が妨げられていないこと）です。風通しの悪いところや湿度が高すぎる場所、直射日光の当たる場所に設置しないでください。

小さな部品はお子様や幼児の手の届かない場所に保管してください。誤って飲み込んだ場合は、ただちに医師にご連絡ください。

AC アダプター本体部分を持ってコンセントに抜き差ししてください。ケーブルを持つて抜き差しすると断線などの危険性があります。また、濡れた状態で AC アダプター本体およびケーブルに触れないでください。感電の原因になります。本機や家具などをケーブルの上に置いたり挟んだりしないでください。ケーブルが傷ついた場合、火災や感電の原因となります。損傷した場合は修理を依頼してください。電源プラグの差し込みが不完全のまま使用すると、感電、発熱による火災の原因となります。プラグが簡単に抜けてしまうようなコンセントは使用しないでください。

電源プラグにほこりなどがたまっていると、火災の原因となります。定期的に電源プラグを抜いて、乾いた布でほこりを取り除いてください。

LAN ケーブルは屋外配線しないでください。

故障の原因となりますので、付属の AC アダプターを本機以外の機器に使用したり、付属品以外の AC アダプターを本機に使用しないでください。

次のような異常状態のまま使用すると、火災・感電の原因となります。すぐに電源プラグをコンセントから抜いて販売店に修理・点検を依頼してください。

煙が出ていたり、変なにおいや音がする。/ 本機を落としてしまった。/ 本機内部に水や金属が入ってしまった。

また、万一内部に水や異物が入ったときや、本機を落としたりカバーが破損した場合は、電源スイッチを切り、電源プラグをコンセントから抜いて販売店に修理・点検を依頼してください。

AC アダプターは容易に手が届くようなコンセントに接続してください。電源の供給を完全に停止するためには、AC アダプターを抜く必要があります。万一の事故に備え、AC アダプターに容易に手が届くようにしてください。

放熱をよくするための機器、壁等から間隔をとり、またラックに入れる時はすき間をあけてください。また、次のような使い方で通風孔をふさがれないでください。内部に熱がこもり、火災の原因となることがあります。

- あおむけや横倒し、逆さまにする。
- 押し入れなど、風通しの悪い狭いところに押し込む。
- じゅうたんやふとんの上に置く。
- テーブルクロスなどをかける。



注意

本機を組み立てる際には、指などを挟まないよう充分にご注意ください。また、ネジ止めの箇所はしっかりと止めてください。不十分な組み立て方をすると強度が保てず、機器が倒れたりして故障やけがの原因になることがあります。

雷が鳴り出したら本機、接続機器、電源プラグ、アンテナ、接続ケーブルなどに触れないでください。感電の原因となります。

本機通風孔付近は放熱のため高温になることがあります。電源が入っているときや、電源を切ったあとしばらくは通風孔付近にご注意ください。

移動時は電源プラグや接続ケーブルをはずしてください。また、本機の上に他の機器を乗せたまま移動しないでください。落下や転倒しでけがの原因になります。

ご相談窓口・修理窓口のご案内

■販売店の「長期保証」制度にご加入の場合は

保証の手続き上、お買い上げになった販売店様での受け付けが必要です。長期保証期間内の製品は、店頭への修理品持込みをお願いいたします。

■お電話による故障判定と、修理受け付け

■意外的な操作ミスが故障と思われる場合があります。お問い合わせの前に取扱説明書をもう一度お調べください。また弊社ホームページサポート情報にもトラブル解決のFAQを掲載していますので、ご参照ください。

オンキヨーオーディオコールセンター

050-3161-9555

(受付時間：10:00～18:00 土・日・祝日もおよび弊社で定める休業日を除きます)

- 製品操作のご案内、付属パーツのご要望、その他ご不明な点についても受け付けております。
- スムーズな対応のため、お問い合わせの次に次の情報をお調べください。
製品の型番 / 接続している他機器 / できるだけ詳しい不具合状況 / ご購入店名 / ご購入年月日

■メールによる修理お申込み

<http://www.jp.onkyo.com/support/servicebase.htm>
からお申込みいただけます。

■お近くの修理拠点へ持込みをご希望の場合は

次のURLに全国の修理拠点の案内がございます。
<http://www.jp.onkyo.com/support/servicebase.htm>

■保証期間終了後の修理について

修理によって機能が維持できる場合は、お客様のご要望により有料修理いたします。本機の補修性能部品は、製造打ち切り後、最大8年間保有しています。保有期間経過後でも故障箇所によっては修理可能な場合がありますので、ご相談ください。

電話番号、受付時間などは変更になる場合がございます。

音響映像機器保証書

持込修理

品番 (製品名)		HDB-RX1	製造番号 (SERIAL)	本体に記載
お客様様	お名前			様
	ご住所 〒			
	電話番号 () -			
	お買い上げ日			取扱販売店名・住所・電話番号
年 月 日				
保証期間 (お買い上げ日より)				
本体 (ただし、消耗品・ソフトウェアは除く)		3年		

●お客様へお願い

お手数ですが、ご住所、お名前、お電話番号をご記入ください。ご購入時の納品書、領収書等の添付がある場合、お買い上げ日、取扱販売店名等の記載に代えることができます。

この保証書は、本書に記載の内容で無料修理を行うことをお約束するものです。保証期間中に万一故障が発生した場合は、保証書をご提示のうえ、オンキヨーオーディオコールセンター、お買い上げの販売店またはオンキヨーサービス拠点に修理をご依頼ください。

■無料修理規定

本保証書は保証期間中、製品のハードウェアの保証をするものです。

- 取扱説明書、本体貼付ラベル等の注意にしたがったご使用で故障した場合には、無料修理をいたします。
- 保証期間内に故障して無料修理をお受けになる場合には、製品と保証書およびご購入店、お買い上げ日の分かる書類等をご持参ご提示のうえ、お買い上げの販売店、またはオンキヨーオーディオコールセンター (050-3161-9555)、オンキヨーサービス拠点にご依頼ください。製品を送られるときは送料をご負担ください。返送時は当社で送料を負担いたします。
- この範囲、ご贈答品等で本保証書に記入してあるお買い上げの販売店に修理が依頼できない場合には、オンキヨーオーディオコールセンターにご相談ください。
- 保証期間内でも次の場合には有料修理になります。
 - (1) 使用上の誤りまたは不当な修理や改造による故障および損傷
 - (2) お買い上げ後の取付場所の移動、落下等による故障および損傷
 - (3) 火災、地震、水害、落雷、その他の天災地変、公害、煙害、ガス害 (硫化ガス等)、異常電圧、指定外の使用電源 (電圧、周波数)、水掛かり等による故障および損傷
 - (4) 一般家庭用以外 (例えば、業務用の使用、車両・船舶への搭載等) に使用された場合の故障および損傷
 - (5) 消耗品 (各部ゴム、電池、キャリングケース等) の交換
 - (6) 保証書の提示がない場合
 - (7) 保証書にお買い上げ年月日、お客様名、販売店名の記入がない場合、あるいは文字を書きかえられた場合
 - (8) 故障の原因が本製品以外の他の製品にある場合
 - (9) 出張修理などを行った場合は、出張料はお客様のご負担となります。
- 保証書は日本国内においてのみ有効です。
This warranty is valid only in Japan.
- 保証書は再発行いたしませんので紛失しないよう大切に保管してください。
- 故障その他による営業上の機会損失は当社では保証いたしません。

※ お客様にご記入いただいた保証書は、保証期間内のサービス活動およびその後の安全点検活動のために記載内容を利用して頂く場合がございますので、ご了承ください。

※ この保証書は、本書に明示した期間、条件のもとにおいて無料修理をお約束するものです。したがってこの保証書によって、保証書を発行している者 (保証責任者)、およびそれ以外の事業者に対するお客様の法律上の権利を制限するものではありませんので、保証期間経過後の修理等についてご不明の場合は、お買い上げの販売店またはオンキヨーオーディオコールセンターにお問い合わせください。修理によって機能が維持できる場合はお客様のご要望により有料修理いたします。

商

安全

■警告

为避免触电危险，请勿拆卸盖子（或背面板）。机内没有可供用户自行修理的零部件。维修事宜交由有资格的维修人员进行。

本装置不具備防水性。为防止火灾或触电事故，请勿将任何装有液体的容器（如花瓶或花盆）安放在本装置附近，或将具暴露于滴水、飞溅、雨或湿气之中。

为防止火灾事故，请勿将任何明火源（如点燃的蜡烛等）安放在本装置上。

小部件应存放在儿童和婴儿触及不到的地方。如果不小心吞食，请立即就医。

机壳上备有的细缝和开口用于通风，以确保本产品可靠的动作，以及防止过热。为防止火灾事故，切勿用物件（如报纸、桌布、窗帘等）堵住或盖住这些开口，或在厚地毯或床上操作本装置。

放置此设备时，请确保电源插头和插座可以轻松接触到。

请将 AC 适配器存放在儿童和婴儿无法接触的地方。
AC 适配器电线可能会意外绕在脖子上，从而导致窒息。

■注意事項

工作环境

工作环境的温度和湿度：+5° C 至 +35° C；小于 85 %RH（冷却口未堵塞）请勿将本装置安置在通风不良的场所，或暴露于高温或太阳直射的场所。

重要通知

本设备的型号和序列号位于后部或底部。请在随附的保修卡上记录这些编号并放在安全的位置供将来参考。

本产品只适宜一般家庭用途。如果是由于应用在其他非家庭用途（如做为商业用途或长期使用于餐厅中，或者使用于汽车或船中）而导致发生故障并需要修理，在保用期间内必须承担修理费用。

AC 适配器注意事项

将 AC 适配器插入或拔出插座时，请握住适配器的主体。直接拉扯线缆插拔可能导致电线断开等危险。湿手时请勿触碰 AC 适配器的主体或线缆。否则可能导致触电。请勿用本机或者家具压住线缆，也不要挤压线缆。线缆损坏可能导致火灾或触电。如果线缆损坏，请联系进行维修。如果在插头未完全插入的情况下使用本机，则可能由于过热而导致触电或起火。不要使用很容易就能拔掉插头的插座。

请勿将本机随附的 AC 适配器用于本机之外的设备，也不要使用非本机随附的 AC 适配器，否则可能导致故障。

请勿在户外连接以太网线缆。

为了能够正确处理、回收利用旧产品和旧电池，请依照所在国家的相关法规，将其送往相应收集点。



产品上标有左侧的标记时，表示含有有毒有害物质的含量超过 GB/T26572-2011 规定的限量要求的部件。根据 SJ/T11364-2014 的标识要求，环境保护使用期限为 10 年。但是，遥控器中使用的电池等消耗品除外。有关含有的部位请参阅下表。根据产品机体上贴有的序号能够了解制造年份。序号的开头的数字表示制造年份。
例如，“17 SERIAL * * * * *”表示 2017 年制造。

有毒有害物质或元素名称及含量标识格式

- 表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T26572-2011 规定的限量要求以下。
- × 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T26572-2011 规定的限量要求。

部件名称	有毒有害物质或元素					
	Pb	Hg	Cd	Cr (VI)	PBB	PBDE
	铅	汞	镉	六价铬	多溴联苯	多溴二苯醚
电子产品（× 表示部分电子产品产品的安装电路板和附属品内的保险丝、显示屏、陶瓷元件、半导体、端子的铅含量超出 1000ppm。）	○	○	○	○	○	○
外部装饰方面	○	○	○	○	○	○
安装电路板	×	○	○	○	○	○
附属品	×	○	○	○	○	○
包装品	○	○	○	○	○	○

保修

Integra国内特约维修中心

保修3年

尊敬のユーザー

您可以通过以下方式获取维修网点信息：

- 1) 登录Integra官网 (www.integra.com.cn) 点击Service
- 2) 关注Integra微信-服务支持-售后网络
- 3) 拨打Integra服务热线:400-876-0898



微信二维码

1. This product is warranted free in workmanship and spare as a result of manufacturing defect for THREE YEARS from the date of purchase.However, the same offer will be limited to Three Months from the date of purchase for industrial/commercial outlets such as club, restaurant, hospital, staff quarter, beauty parlour,guest house, etc.
2. This warranty will become void, in the judgement of our technician, if the product (a) has been repaired or modified by an non-authorized person, or (b)has been damaged through misuse; negligence; abuse; or any accident from nature(like fire, flood, struck by lightning), or (c) was improperly installed or was installed in sealed upenvironment, or(d)the serial number has been altered, effaced or removed, or(e)was damaged which was caused by external connection with other equipment.
3. This Warranty Card must be presented along with the original Purchase Receipt whenever any warranty service or out of warranty service is required.
4. All transportation, shipping, freight and insurance charges of any defective equipment must be paid by the end user.
5. This Warranty Card is not transferable and Mainland China.
Remark:The warranty terms and conditions may be revised without prior notice.

请用户在购机后登陆我官网“www.integra.com.cn”的服务与支持板块进行产品注册，以享受保修和更多增值服务。

End user should register your product online at the "Service and Support"section of Integra official website(www.integra.com.cn)after a purchase, in order to better enjoy warranty and other extened service.

1. 本货品从发源购买之日起计，将有三年的保修期。但用于工业、商业或店铺用途上，如会所、餐厅、医院、员工休息室、美容院等等，则保修期为三个月。在保修期内如因制造上有缺陷，所有维修之费用及零件将全部免费。
2. 经由本公司之技术人员判断本产品：(a) 曾由未经本公司授权之人士维修或改装；或(b)曾因错误操作、疏忽使用人为损坏，或 (c) 自然环境所损坏 (如火灾、水灾、雷击等等)；或 (d) 安装不当或至于密封环境内；或 (e) 因外接其他设备所引致的故障和损坏；或 (f) 机身编号曾被篡改，此保修将会自动无效。
3. 用户在需要维修服务的时候，不论是在保修期内或保修期外，都要同时出示此保修卡和购机发票
4. 所有维修机的运费费、货运费、邮递费和保险费都必须由用户支付。
5. 此保修卡及所有权益不得转让他人，此保修卡只在中国大陆有效，香港及澳门除外。
(注：本保修内容如有修改，恕不另行通知。)



ATTENTION:
Please keep this Card and Purchase Receipt even the warranty period is over.
注意：请在保修期完了之后也保存此保修卡和购机发票
Please go to the website "Integra.com.cn"for the latest information of networks.
您可登录我司官网www.integra.com.cn获得最新的维修点信息。

安桥(上海)商贸有限公司

上海市徐汇区茶陵北路20号1号楼302室

电话:86-21-52131366 传真:86-21-52130396 客服热线:4000424228

<http://www.integra.com.cn>

オンキヨー & パイオニア株式会社

〒104-0028 東京都中央区八重洲二丁目3番12号

<http://www.integraworldwide.com>

(C) Copyright 2017 Onkyo&Pioneer Corporation Japan. All rights reserved.

Integra Limited Warranty (USA)

PLEASE RETAIN YOUR ORIGINAL BILL OF SALE AS YOU WILL NEED TO PRESENT IT SHOULD YOU REQUIRE SERVICE UNDER THIS WARRANTY. Onkyo USA Corporation (hereinafter referred to as Onkyo) hereby warrants all Integra brand products PURCHASED DIRECTLY FROM Onkyo OR FROM AN INDEPENDENT Integra AUTHORIZED DEALER, in accordance with the following terms and conditions:

WARRANTY PERIOD (from date of purchase):

New Products:

All Integra Products

3 years Parts & Labor

Refurbished Products:

All Integra Products

2 years Parts & Labor

SCOPE OF WARRANTY

From the date of original consumer purchase and for the respective periods specified above, Onkyo agrees to repair, at its sole expense, all Integra brand products purchased directly from Onkyo or from an Independent Integra Authorized Dealer, which are defective in material and/or workmanship during ordinary consumer use. Repairs may be completed using new or refurbished parts that meet or exceed Onkyo specifications for new parts. Onkyo, at its sole discretion, may replace a product, with a refurbished or reconditioned unit having comparable features and a limited consumer warranty.

EXCLUSIONS:

IF YOU PURCHASE AN Integra BRAND PRODUCT FROM AN UNAUTHORIZED DEALER, YOUR Integra WARRANTY MAY NOT BE VALID, please use our authorized dealer locator.

This Warranty does not apply with respect to or cover the following:

1. Defects or damage caused by accident, fire/smoke, flood/water damage, power surge (or related electrical abnormalities), lightning or other acts of nature.
2. Defects or damage caused by abuse, misuse, negligence, accident, unauthorized product modification or service, or failure to observe the instructions contained in the manual furnished at the time of original purchase.
3. Deterioration/failure due to corrosive atmosphere, including but not limited to; smoke, high humidity or extreme temperature.
4. Damage caused during shipment or handling.
5. Products purchased from anyone other than Onkyo or an Independent Integra Authorized Dealer. If you are uncertain as to whether a dealer is authorized, please contact Integra's Customer Relations Department or check the **Dealer and Service Locator** at our web site: <http://www.integrahometheater.com>.
6. Products that have had their serial numbers altered or removed.
7. Products purchased in "AS IS" condition or noted as "DEMO", "DISPLAY", "OPEN BOX" or "CLEARANCE".
8. Products that have been altered or repaired by anyone other than Onkyo or an Integra authorized independent service center in a manner that has affected their performance, stability or reliability.
9. Accessories attached to or to be used with Integra products, such as antennas, batteries, cables, etc.
10. Packing materials and cosmetic items.
11. Parts which have prescribed useful lives dependent upon the degree of their use, such as styli, cassette heads, idler wheels, batteries, etc.
12. Installation and removal of Integra products, setup, adjustment or signal reception issues.
13. Maintenance, cleaning or periodic check-ups.
14. Adjustments or alterations required for compatibility with conditions pertaining to foreign countries.

OBTAINING WARRANTY SERVICE:

To obtain warranty service, take or ship your Integra product to an Integra Authorized Independent Service Center, together with a note describing your complaint and your copy of the dated purchase receipt. Repairs are not performed at our headquarters; all repairs must be performed by our Integra Authorized Independent Service Centers. For a current list of Integra Authorized Independent Service Centers please go to; www.integrahometheater.com, under **Support**. Please also include in any mailing a contact name, address and telephone number. If you choose to ship your Integra product to an Integra Authorized Independent Service Center, all shipping arrangements must be made by you and all shipping charges and insurance must be fully prepaid. Any Integra product shipped in its entirety must be properly packaged to avoid shipping damage. Any shipping damage incurred as a result of improper or insufficient packaging will be the responsibility of the shipper. Onkyo will pay all return shipping charges for Integra products that have been serviced under this warranty. Any service or repair for items not covered by this limited warranty shall be at the Authorized Independent Service Center's rates and terms then in effect. Contact an Integra Authorized Independent Service Center for details.

LIMITATIONS:

Onkyo makes this warranty subject to the following limitations:

1. This Warranty is valid only within the territory of the United States of America. To be covered by this warranty the Integra product concerned must have been purchased directly from Onkyo or an Independent Integra Authorized Dealer and the person seeking warranty service must reside in one of the states of the United States of America or in the District of Colombia. This warranty extends only to the original purchaser and cannot be transferred to anyone.
2. Onkyo SHALL HAVE NO LIABILITY WHATSOEVER FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. THE RESPONSIBILITY OF Onkyo UNDER THIS WARRANTY SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT OF DEFECTIVE Integra PRODUCTS BY Onkyo OR ITS AUTHORIZED INDEPENDENT SERVICE CENTERS.
3. This warranty is valid only with respect to repairs effected by Onkyo or an Integra independent authorized service center.
4. ALL WARRANTIES OTHER THAN THE EXPRESS WARRANTY HEREIN CONTAINED INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED IN DURATION TO THE APPLICABLE WARRANTY PERIOD SET FORTH ABOVE. Some states do not allow limitations on how long an implied warranty lasts and some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights that vary from state to state.

Integra Limited Warranty (Canada)

PLEASE RETAIN YOUR ORIGINAL BILL OF SALE AS YOU WILL NEED TO PRESENT IT SHOULD YOU REQUIRE SERVICE UNDER THIS WARRANTY. Onkyo USA Corporation (hereinafter referred to as Onkyo) hereby warrants all Integra brand products PURCHASED DIRECTLY FROM Onkyo OR FROM AN INDEPENDENT Integra AUTHORIZED DEALER, in accordance with the following terms and conditions:

WARRANTY PERIOD (from date of purchase):

New Products:

All Integra Products

3 years Parts & Labor

Refurbished Products:

All Integra Products

2 years Parts & Labor

SCOPE OF WARRANTY

From the date of original consumer purchase and for the respective periods specified above, Onkyo agrees to repair, at its sole expense, all Integra brand products purchased directly from Onkyo or from an Independent Integra Authorized Dealer, which are defective in material and/or workmanship during ordinary consumer use. Repairs may be completed using new or refurbished parts that meet or exceed Onkyo specifications for new parts. Onkyo, at its sole discretion, may replace a product, with a refurbished or reconditioned unit having comparable features and a limited consumer warranty.

EXCLUSIONS:

IF YOU PURCHASE AN Integra BRAND PRODUCT FROM AN UNAUTHORIZED DEALER, YOUR Integra WARRANTY MAY NOT BE VALID, please use our authorized dealer locator.

This Warranty does not apply with respect to or cover the following:

1. Defects or damage caused by accident, fire/smoke, flood/water damage, power surge (or related electrical abnormalities), lightning or other acts of nature.
2. Defects or damage caused by abuse, misuse, negligence, accident, unauthorized product modification or service, or failure to observe the instructions contained in the manual furnished at the time of original purchase.
3. Deterioration/failure due to corrosive atmosphere, including but not limited to; smoke, high humidity or extreme temperature.
4. Damage caused during shipment or handling.
5. Products purchased from anyone other than Onkyo or an Independent Integra Authorized Dealer. If you are uncertain as to whether a dealer is authorized, please contact Integra's Customer Relations Department or check the **Dealer and Service Locator** at our web site: <http://www.integrahometheater.com>.
6. Products that have had their serial numbers altered or removed.
7. Products purchased in "AS IS" condition or noted as "DEMO", "DISPLAY", "OPEN BOX" or "CLEARANCE".
8. Products that have been altered or repaired by anyone other than Onkyo or an Integra authorized independent service center in a manner that has affected their performance, stability or reliability.
9. Accessories attached to or to be used with Integra products, such as antennas, batteries, cables, etc.
10. Packing materials and cosmetic items.
11. Parts which have prescribed useful lives dependent upon the degree of their use, such as styli, cassette heads, idler wheels, batteries, etc.
12. Installation and removal of Integra products, setup, adjustment or signal reception issues.
13. Maintenance, cleaning or periodic check-ups.
14. Adjustments or alterations required for compatibility with conditions pertaining to foreign countries.

OBTAINING WARRANTY SERVICE:

To obtain warranty service, take or ship your Integra product to an Integra Authorized Independent Service Center, together with a note describing your complaint and your copy of the dated purchase receipt. Repairs are not performed at our headquarters; all repairs must be performed by our Integra Authorized Independent Service Centers. For a current list of Integra Authorized Independent Service Centers please go to; www.integrahometheater.com, under **Support**. Please also include in any mailing a contact name, address and telephone number. If you choose to ship your Integra product to an Integra Authorized Independent Service Center, all shipping arrangements must be made by you and all shipping charges and insurance must be fully prepaid. Any Integra product shipped in its entirety must be properly packaged to avoid shipping damage. Any shipping damage incurred as a result of improper or insufficient packaging will be the responsibility of the shipper. Onkyo will pay all return shipping charges for Integra products that have been serviced under this warranty. Any service or repair for items not covered by this limited warranty shall be at the Authorized Independent Service Center's rates and terms then in effect. Contact an Integra Authorized Independent Service Center for details.

LIMITATIONS:

Onkyo makes this warranty subject to the following limitations:

1. This Warranty is valid only within the territory of the United States of America. To be covered by this warranty the Integra product concerned must have been purchased directly from Onkyo or an Independent Integra Authorized Dealer and the person seeking warranty service must reside in one of the states of the United States of America or in the District of Colombia. This warranty extends only to the original purchaser and cannot be transferred to anyone.
 2. Onkyo SHALL HAVE NO LIABILITY WHATSOEVER FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. THE RESPONSIBILITY OF Onkyo UNDER THIS WARRANTY SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT OF DEFECTIVE Integra PRODUCTS BY Onkyo OR ITS AUTHORIZED INDEPENDENT SERVICE CENTERS.
 3. This warranty is valid only with respect to repairs effected by Onkyo or an Integra independent authorized service center.
 4. ALL WARRANTIES OTHER THAN THE EXPRESS WARRANTY HEREIN CONTAINED INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED IN DURATION TO THE APPLICABLE WARRANTY PERIOD SET FORTH ABOVE. Some states do not allow limitations on how long an implied warranty lasts and some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights that vary from state to state.
- Onkyo and Integra are registered trade-marks of Onkyo Kabushiki Kaisha and used under license by Onkyo USA Corporation.

Garantie limitée d'Integra (Canada)

VEUILLEZ CONSERVER VOTRE FACTURE ORIGINALE PUISQUE VOUS DEVREZ LA PRÉSENTER POUR VOUS PRÉVALOIR DU SERVICE AUX TERMES DE LA PRÉSENTE GARANTIE. Onkyo USA Corporation (ci-après appelée Onkyo) garantit tous les produits de marque Integra ACHETÉS DIRECTEMENT AUPRÈS D'ELLE OU D'UN MARCHAND INDÉPENDANT AUTORISÉ Integra AU CANADA, conformément aux modalités et conditions suivantes :

PÉRIODE DE GARANTIE (à compter de la date d'achat):

Nouveaux produits:	
Tous les produits Integra	3 ans pièces et main-d'œuvre
Produits remis à neuf :	
Tous les produits Integra	2 ans pièces et main-d'œuvre

PORTÉE DE LA GARANTIE

A compter de la date de l'achat initial et durant les périodes précisées ci-dessus, Onkyo accepte de réparer, à ses frais, tous les produits de marque Integra achetés directement auprès d'elle ou d'un marchand indépendant autorisé Integra au Canada qui présentent des vices de matériaux et/ou de fabrication au cours de l'utilisation normale. Les réparations peuvent être effectuées au moyen de pièces neuves ou remises à neuf qui respectent ou dépassent les spécifications établies par Onkyo pour les pièces neuves. Onkyo, à son entière discrétion, peut remplacer un produit par une unité remise à neuf ou remise en état ayant des caractéristiques comparables et une garantie limitée.

EXCLUSIONS:

SI VOUS ACHETEZ UN PRODUIT DE MARQUE Integra AUPRÈS D'UN MARCHAND NON AUTORISÉ, VOTRE GARANTIE D'Integra POURRAIT NE PAS ÊTRE VALIDE; veuillez utiliser notre localisateur de marchand autorisé.

La présente garantie ne s'applique pas à l'égard des éléments suivants :

1. Les défauts ou les dommages causés par un accident, un incendie ou de la fumée, une inondation ou de l'infiltration d'eau, une saute de puissance (ou des anomalies électriques connexes), la foudre ou d'autres calamités naturelles.
2. Les défauts ou les dommages causés par un usage abusif, une mauvaise utilisation, un accident, une modification ou un entretien non autorisé du produit ou le défaut de suivre les instructions du manuel fourni au moment de l'achat initial.
3. Une détérioration/défaillance en raison d'une atmosphère corrosive, notamment de la fumée, un taux élevé d'humidité ou une température extrême.
4. Les dommages causés au cours de la livraison ou la manutention.
5. Les produits achetés auprès d'une personne autre qu'Onkyo ou qu'un marchand indépendant autorisé Integra. Si vous ignorez si un marchand est autorisé, veuillez communiquer avec le service à la clientèle d'Integra ou consulter le localisateur de marchand et de centre de service sur notre site Web à l'adresse <http://www.integrahometheater.com>.
6. Les produits dont le numéro de série a été modifié ou effacé.
7. Les produits achetés « TEL QUEL » ou identifiés comme « DÉMONSTRATEUR », « MODÈLE DU PRÉSENTOIR », « BOÎTE OUVERTE » ou « LIQUIDATION ».
8. Les produits qui ont été modifiés ou réparés par une personne autre qu'Onkyo ou qu'un centre de service indépendant autorisé Integra de façon à affecter leur rendement, leur durabilité ou leur fiabilité.
9. Les accessoires attachés aux produits Integra ou devant être utilisés avec ceux-ci, comme les antennes, les piles, les câbles, etc.
10. Tout produit attaché au produit de marque Integra ou devant être utilisé avec celui-ci.
11. Les matériaux d'emballage et les éléments de présentation.
12. Les pièces qui ont une durée de vie utile prescrite en fonction de leur utilisation, comme les stylets, les têtes de lecture, les engrenages, les piles, etc.
13. L'installation et le démontage des produits de marque Integra, la configuration, les ajustements ou les problèmes de réception du signal.
14. L'entretien, le nettoyage ou les mises au point périodiques.
15. Les ajustements ou les modifications nécessaires pour assurer la conformité aux normes de pays étrangers.
16. La perte ou la corruption de données ou de programmes stockés ou les dommages à ceux-ci.

EXÉCUTION DE LA GARANTIE:

Pour faire exécuter la garantie, veuillez remettre ou expédier votre produit Integra à un centre de service indépendant autorisé Integra, avec une note décrivant le problème et votre copie du reçu d'achat daté. Les réparations ne sont pas effectuées à notre siège social; toutes les réparations doivent être effectuées par nos centres de service indépendants autorisés Integra. Pour consulter une liste courante des centres de service indépendants autorisés Integra, veuillez aller au www.integrahometheater.com, sous l'onglet **Support**. Veuillez également inclure dans tout envoi postal le nom de la personne à joindre, son adresse et son courriel ou son numéro de téléphone. Si vous choisissez d'expédier votre produit de marque Integra à un centre de service indépendant autorisé Integra, vous devez prendre les dispositions nécessaires pour assurer la livraison et régler d'avance l'ensemble des frais et des assurances liés à la livraison. Tout produit Integra expédié dans son intégralité doit être emballé de façon appropriée pour éviter les dommages causés en cours d'expédition. L'expéditeur sera responsable à l'égard de tous dommages subis, en cours d'expédition, en raison d'un emballage inapproprié ou insuffisant. Onkyo paiera la totalité des frais d'expédition de retour pour les produits Integra dont la garantie a été exécutée. Les services fournis ou les réparations effectuées à l'égard d'éléments qui ne sont pas couverts par la présente garantie limitée seront effectués selon les tarifs et les modalités en vigueur du centre de service indépendant autorisé. Pour obtenir plus de détails, communiquez avec un centre de service autorisé Integra.

LIMITATIONS:

Onkyo donne la présente garantie sous réserve des limitations suivantes :

1. La présente garantie limitée n'est valide qu'au Canada. Pour être couvert par la présente garantie, le produit de marque Integra en cause doit être acheté directement auprès d'Onkyo ou d'un marchand indépendant autorisé Integra au Canada et la personne qui désire se prévaloir de la garantie doit être un résident du Canada. La présente garantie ne vise que l'acheteur d'origine et elle ne peut être cédée à une autre personne.
2. Onkyo N'ASSUME AUCUNE RESPONSABILITÉ DE QUELQUE NATURE QUE CE SOIT EN CAS DE DOMMAGES SPÉCIAUX, CONSÉCUTIFS OU INDIRECTS EN RAISON DE LA VIOLATION D'UNE GARANTIE OU CONDITION EXPLICITE, RÉPUTÉE OU IMPLICITE, OU DE LA PERTE, DE L'ENDOMMAGEMENT OU DE LA CORRUPTION DE TOUTE DONNÉE OU TOUT PROGRAMME STOCKÉ DANS LE PRODUIT OU UTILISÉ AVEC CELUI-CI. LA RESPONSABILITÉ D'Onkyo AUX TERMES DE LA PRÉSENTE GARANTIE SE LIMITE À LA RÉPARATION DES PRODUITS Integra DÉFECTUEUX PAR Onkyo OU PAR SES CENTRES DE SERVICE INDÉPENDANTS AUTORISÉS.
3. La présente garantie n'est valide qu'à l'égard des réparations effectuées par Onkyo ou par un centre de service indépendant autorisé Integra.
4. SAUF DANS LA MESURE INTERDITE PAR LES LOIS APPLICABLES, TOUTES LES CONDITIONS OU GARANTIES IMPLICITES DE QUALITÉ MARCHANDE OU DE CONVENANCE À UNE FIN PARTICULIÈRE OU TOUTES LES CONDITIONS OU GARANTIES RÉPUTÉES EN VERTU DES LOIS APPLICABLES SUR LA PROTECTION DES CONSOMMATEURS SONT D'UNE DURÉE LIMITÉE CONFORMÉMENT À LA DURÉE DE LA GARANTIE APPLICABLE SUSMENTIONNÉE.

Certains territoires n'autorisent aucune restriction sur les garanties implicites ni l'exclusion ou la limitation des dommages consécutifs ou indirects de sorte que les limitations ou les exclusions susmentionnées pourraient ne pas s'appliquer dans votre cas. La présente garantie vous confère des droits précis et vos droits pourraient varier selon les territoires.

Onkyo et Integra sont des marques de commerce déposées d'Onkyo Kabushiki Kaisha et sont utilisées en vertu d'une licence par Onkyo USA Corporation.

Integra

Product Registration (USA and Canada)

Product Registration

Thank you for purchasing this Integra product. In order to protect your investment and to receive information on new products and updates, please register. Please visit our web site for your online registration at:

www.integrahometheater.com/prod_reg.cfm

Online Customer Support

www.integrahometheater.com/ can assist you anytime with Frequently Asked Questions, Hookup Diagrams, and Service Information.

We offer Product Support 7 days per week

Integra has extended its product support hours to a seven-day schedule. For questions, assistance, or comments, please call us or visit on our website at:

Tel 1-800-225-1946
Web www.integrahometheater.com/prod_support.cfm

Integra Division of Onkyo USA Corporation

18 Park Way, Upper Saddle River, NJ 07458
Phone: 201-818-9200 Fax: 201-785-2650

Enregistrement du produit (États Unis et Canada)

Enregistrement du produit

Nous vous remercions d'avoir acheté ce produit Integra. Pour protéger votre investissement et pour recevoir de l'information sur nos nouveaux produits ainsi que des mises à jour, veuillez enregistrer votre produit. Pour ce faire, consultez notre site Web aux adresses suivantes :

www.integrahometheater.com/prod_reg.cfm

Soutien à la clientèle en ligne

Vous pouvez obtenir de l'aide en tout temps sur le site www.integrahometheater.com/ en consultant les sections Frequently Asked Questions, Hookup Diagrams et Service Information.

Nous offrons un soutien technique 7 jours sur 7

Integra offre maintenant un soutien technique 7 jours sur 7. Pour obtenir de l'aide, des réponses à vos questions, ou pour soumettre vos commentaires, veuillez communiquer avec nous par téléphone ou consulter notre site Web :

Téléphone 1-800-225-1946
Sites Web www.integrahometheater.com/prod_support.cfm

Integra Division of Onkyo USA Corporation

18 Park Way, Upper Saddle River, NJ 07458
Téléphone: 201-818-9200 Télécopieur: 201-785-2650